

SMART CONTROLLER C-300



Specification:

Photoelectric isolated 6 discrete input/6 Relay outputs

Batch Controlling (Near Zero, SP1, SP2 & Finished)

High speed filtering arithmetic

Auto Zero Tracking

Power -up Auto Clear Zero

1 Serial port(RS485),MODBUS RTU

Save 10 recipes with totals weights



3.5" TFT screens, weights and parameter are displaying at one time ,

17 Flat switch membrane with tactile-feel keys





SMART CONTROLLER C-300


Key Pad detail

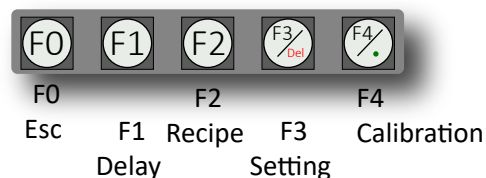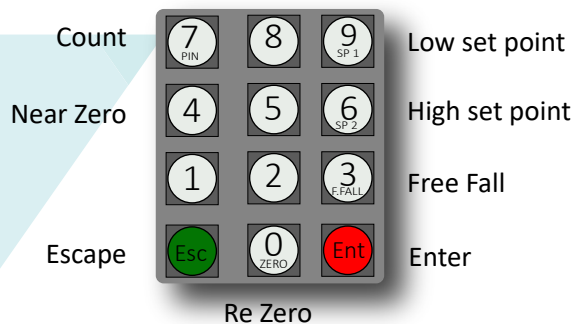

In/out connection definition

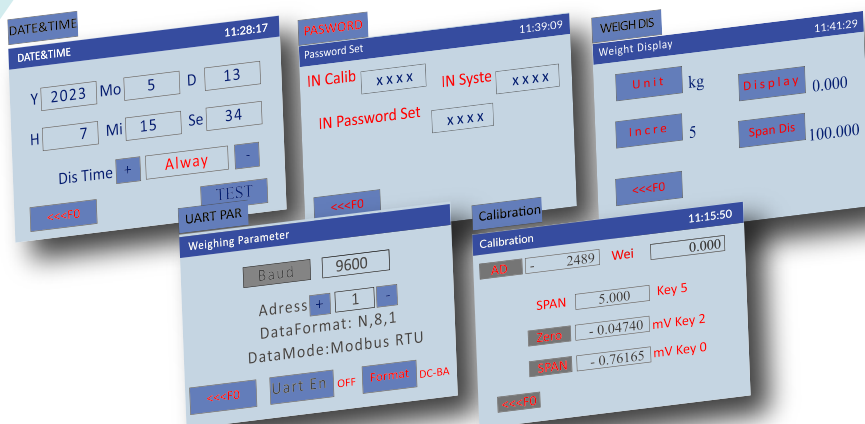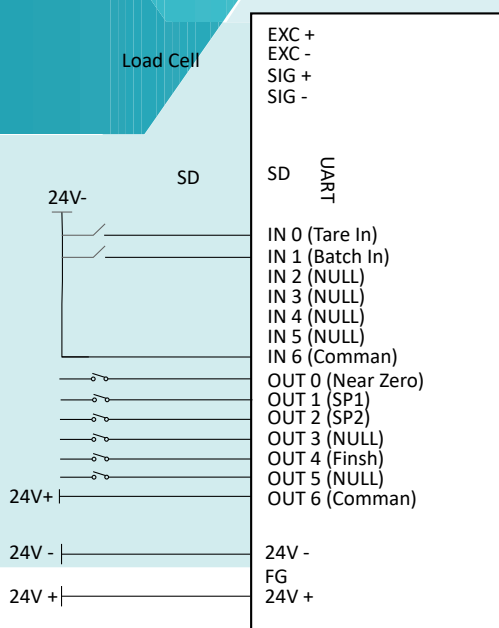

DIMENSIONS:

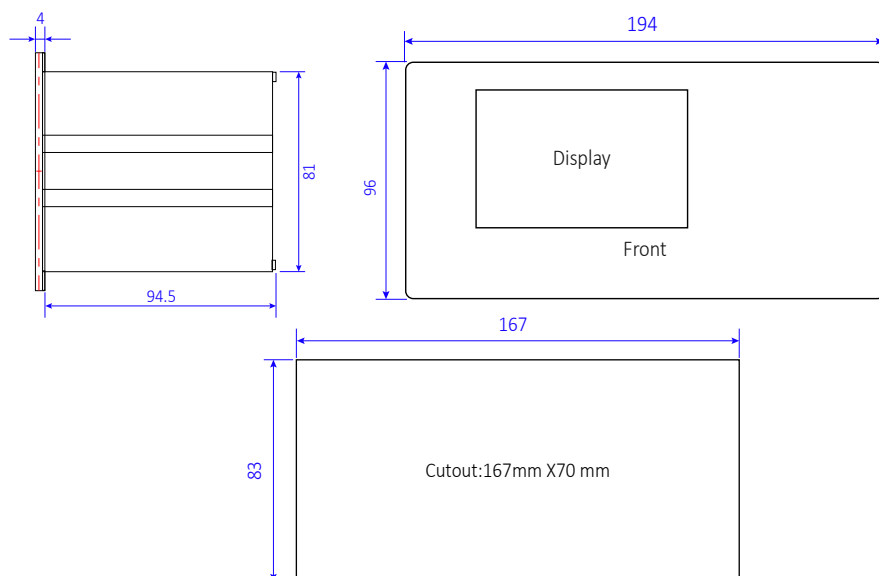

Reliable and Rugged!